

AMF 系列




規格

型 號	AMF2001 AMF2002	AMF3002 AMF3003	AMF4003 AMF4004 AMF4006	AMF5006 AMF5010
使用流體	空氣			
壓力表口徑	1/8"PT		1/4"PT	
進、出氣接管口徑	1/8"PT、1/4"PT	1/4"PT、3/8"PT	3/8"PT、1/2"、3/4"PT	3/4"PT、1"PT
保證耐壓力	15 Kg/cm ²			
最高使用壓力	10 Kg/cm ²			
周圍溫度與流體溫度℃	-5~+60(無結凍狀態)			
過濾精度	標準為 25 μm: 青銅顆粒燒結 (5μm: 聚丙烯纖維)			
外殼防護裝置	標準裝置			
濾水杯材質	PC			


符號




訂購碼

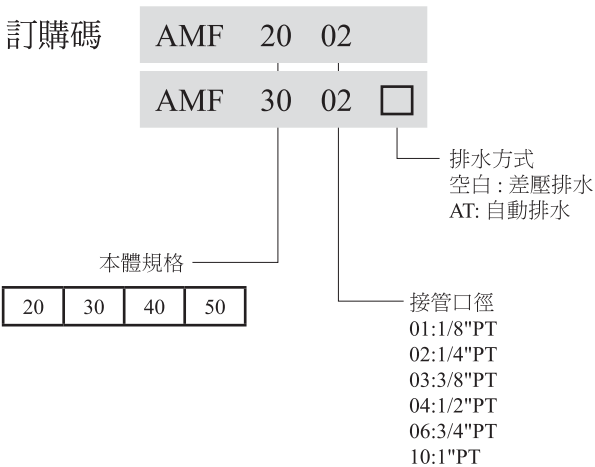


流量特性 AMF20 系列




AMF30 系列









流量特性 AMF40 系列



AMF50 系列



AMF 系列 外型尺寸圖

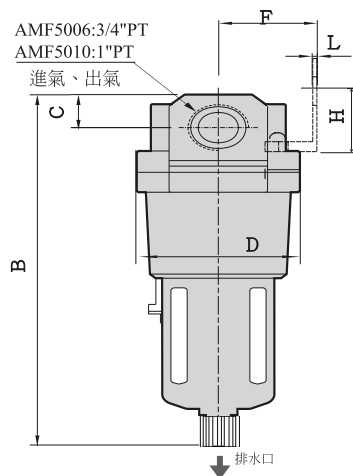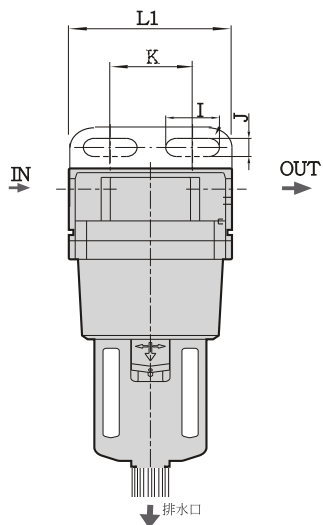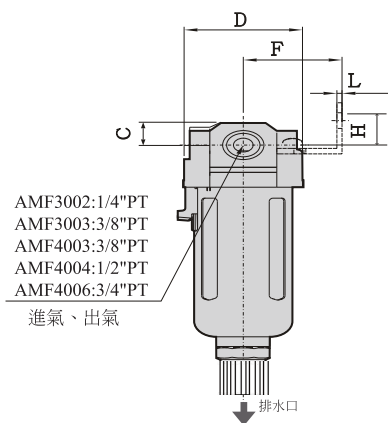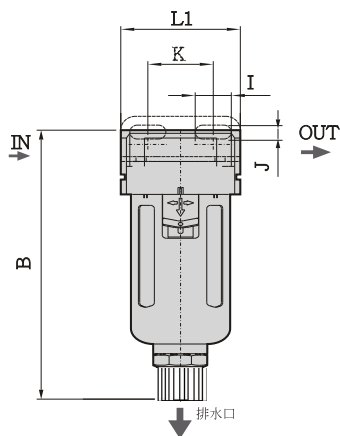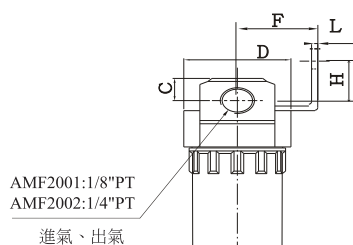

規格型號 \ 符號	B	C	D	F	H	I	J	K	L	L1
AMF2001、AMF2002	97.5	11	40	30	22	8.4	5.5	27	2.3	40
AMF3002、AMF3003	132.5	14	53	41	23	8	6.5	40	2.3	53
AMF4003、AMF4004	168.5	18	70	50	26	11	8.5	54	2.3	70
AMF4006	172.5	20	70	50	25	11	8.5	54	2.3	70
AMF5006、AMF5010	247.5	24	90	67	35	13	11	66	3.2	90